

# C7-SERIES SUBWOOFER MANUAL

**Thanks for buying our product!** Product information follows; please read it carefully to get the most out of your subwoofers. Any questions, you can contact technical support:  
Phone 972-570-0800; Email: tech@crossfirecaraudio.com

*Enjoy!*

## **Subwoofer Power Rating:**

Power handling for subwoofers depends on the conditions used. How loudly you play, what type of music and how hard you drive the amplifier are more important than any numbers-but of course, some kind of numeric guideline is necessary for convenience. Therefore, Crossfire rates as follows:

**Nominal Power Handling:** This amount of RMS amplifier power should not cause damage to a subwoofer in a recommended enclosure-so long as the amplifier is not clipped.\*

**Maximum Power Handling:** This amount of RMS amplifier power driving the subwoofer at maximum volume continuously could cause damage over time and should be used with caution and without clipping the amp.

## **Notes On Amplifier Power:**

The important rating of an amp is RMS power. If this spec is not exaggerated, it is how many watts the amp can output continuously without distortion. Other specs ("peak" ; "maximum") are not very meaningful in most cases. How does this match a subwoofer's power rating? Read on...

## **Notes On Subwoofer Limits:**

Subs have two limitations: **mechanical** and **thermal**. Crossfire combines these into the ratings explained at the top.

**Thermal power handling** of the woofer is basically how many watts you can pump into it before it burns or melts:

-Amps' RMS power similar to the subwoofers rating should a good match providing the amp is not clipped

-Amp's RMS power much more than subwoofers rating: could damage the sub unless gains are carefully set to prevent the amplifiers ever clipping.

-Amp's RMS power much less than the subwoofers rating: could still damage the sub if the amp is clipped.

**Mechanical power handling** means how far the cone can move before physical parts hit or deform ("bottoming out"). At very low frequencies, it does not take much power to move the subwoofer cone a lot, so even low powered amplifiers could damage the subwoofer. The enclosure affects how easy it is to hit the mechanical limits: please see notes on a later page.

## **\*Amplifier Clipping and Dead Subwoofers:**

When "Clipped" the amplifier tries to put out more power than it is capable of, and the output waveform flattens out, no longer following the music. Viewed on an oscilloscope, it looks like the music waveform has had the tops "clipped off" with scissors.

Under these conditions, an amplifiers could put out over twice it's rated RMS power, causing a subwoofer to overheat.

Additionally, a clipped amplifier can generate DC currents which will drive the subwoofers coil out of position: it may burn and/or hit mechanical limits more easily. A clipping amp will sound highly distorted and crackly. A sub hitting it's mechanical limits tends to sound like a jackhammer or woodpecker. These sounds often indicate damage could be imminent.

**- Bottom line? If it sounds not merely loud but nasty, TURN IT DOWN before something breaks!**

## SPECS AND DIMENSIONS

MODEL:	C7 8D1	C7 8D2	C7 10D1	C7 10D2
Nominal Size	8"	8"	10"	10"
Outer Diameter (OD)	8.7" / 220mm	8.7" / 220mm	10.5" / 267mm	10.5" / 267mm
Inner Diameter (ID)	7.3" / 185mm	7.3" / 185mm	9.3" / 236mm	9.3" / 236mm
Mounting Depth (MD)	5.5" / 140mm	5.5" / 140mm	7.5" / 190mm	7.5" / 190mm
Woofers Displacement	.08ft <sup>3</sup> / 2.18L	.08ft <sup>3</sup> / 2.18L	.12ft <sup>3</sup> / 3.21L	.12ft <sup>3</sup> / 3.21L
Power Handling, RMS	1000 Watts	1000 Watts	1200 Watts	1200 Watts
Power Handling, Max	2000 Watts	2000 Watts	2400 Watts	2400 Watts
Magnet Size	150 OZ	150 OZ	200 OZ	200 OZ
Voice Coil Size / Material	2.5" Aluminum   4 Layer	2.5" Aluminum   4 Layer	3" Aluminum   4 Layer	3" Aluminum   4 Layer
Nominal Impedance (Z)	Dual 1 Ω	Dual 2 Ω	Dual 1 Ω	Dual 2 Ω
D.C. Resistance (Re)	0.5Ω (Paralleled)	1Ω (Paralleled)	0.5Ω (Paralleled)	1Ω (Paralleled)
Resonance Frequency (Fs)	48Hz	49Hz	39Hz	40Hz
Total Q (Qts)	0.27	0.27	0.44	0.36
Mechanical Q (Qms)	5.33	4.45	5.88	6.08
Electrical Q (Qes)	0.29	0.29	0.47	0.38
Stiffness (Vas)	0.15ft <sup>3</sup> / 4.2L	0.15ft <sup>3</sup> / 4.2L	0.35ft <sup>3</sup> / 10L	0.35ft <sup>3</sup> / 10L
Excursion (Xmax)	0.8" / 20mm pk-pk	0.8" / 20mm pk-pk	1.15" / 29mm pk-pk	1.15" / 29mm pk-pk
Cone Area (Sd)	29.3in <sup>2</sup> / 189cm <sup>2</sup>	29.3in <sup>2</sup> / 189cm <sup>2</sup>	51.1in <sup>2</sup> / 330cm <sup>2</sup>	51.1in <sup>2</sup> / 330cm <sup>2</sup>

**Thiele-Small Parameters:** these vary from unit to unit and also according to measurement technique, so don't get too hung up on exactness of the numbers or box design results. By the way, "pk-pk" means peak-to-peak.

**Sensitivity (No):** This spec is omitted because it is for mid frequencies and misleading for subwoofers.

**Woofers Displacement Volume:** For standard drop in mounting, please subtract the subwoofer's displacement volume from the gross enclosure volume to calculate accurate net enclosure volume.

**Vance Dickason's Loudspeaker Cookbook** contains tons of useful information and we highly recommended it

## SPECS AND DIMENSIONS

MODEL:	C7 12D1	C7 12D2	C7 15D1	C7 15D2
Nominal Size	12"	12"	15"	15"
Outer Diameter (OD)	12.6" / 320mm	12.6" / 320mm	15.6" / 395mm	15.6" / 395mm
Inner Diameter (ID)	11.125" / 282mm	11.125" / 282mm	14.125" / 358mm	14.125" / 358mm
Mounting Depth (MD)	8.2" / 208mm	8.2" / 208mm	9.6" / 244mm	9.6" / 244mm
Woofers Displacement	.14ft <sup>3</sup> / 3.85L	.14ft <sup>3</sup> / 3.85L	.21ft <sup>3</sup> / 5.96L	.21ft <sup>3</sup> / 5.96L
Power Handling, RMS	1200 Watts	1200 Watts	1200 Watts	1200 Watts
Power Handling, Max	2400 Watts	2400 Watts	2400 Watts	2400 Watts
Magnet Size	200 OZ	200 OZ	200 OZ	200 OZ
Voice Coil Size / Material	3" Aluminum   4 Layer	3" Aluminum   4 Layer	3" Aluminum   4 Layer	3" Aluminum   4 Layer
Nominal Impedance (Z)	Dual 1 Ω	Dual 2 Ω	Dual 1 Ω	Dual 2 Ω
D.C. Resistance (Re)	0.5Ω (Paralleled)	1Ω (Paralleled)	0.5Ω (Paralleled)	1Ω (Paralleled)
Resonance Frequency (Fs)	35Hz	36Hz	31Hz	32Hz
Total Q (Qts)	0.44	0.41	0.47	0.48
Mechanical Q (Qms)	5.58	6.33	6.01	6.48
Electrical Q (Qes)	0.48	0.43	0.51	0.51
Stiffness (Vas)	0.88ft <sup>3</sup> / 25L	0.88ft <sup>3</sup> / 25L	2.44ft <sup>3</sup> / 69L	2.44ft <sup>3</sup> / 69L
Excursion (Xmax)	1.26" / 32mm pk-pk	1.26" / 32mm pk-pk	1.34" / 34mm pk-pk	1.34" / 34mm pk-pk
Cone Area (Sd)	77.4in <sup>2</sup> / 499cm <sup>2</sup>	77.4in <sup>2</sup> / 499cm <sup>2</sup>	126.2in <sup>2</sup> / 814cm <sup>2</sup>	126.2in <sup>2</sup> / 814cm <sup>2</sup>

MODEL:	C7 18D1	C7 18D2
Nominal Size	18"	18"
Outer Diameter (OD)	18.5" / 470mm	18.5" / 470mm
Inner Diameter (ID)	16.75" / 425mm	16.75" / 425mm
Mounting Depth (MD)	10.5" / 267mm	10.5" / 267mm
Woofers Displacement	.26ft <sup>3</sup> / 7.4L	.26ft <sup>3</sup> / 7.4L
Power Handling, RMS	1200 Watts	1200 Watts
Power Handling, Max	2400 Watts	2400 Watts
Magnet Size	280 OZ	280 OZ
Voice Coil Size / Material	3" Aluminum   4 Layer	3" Aluminum   4 Layer
Nominal Impedance (Z)	Dual 1 Ω	Dual 2 Ω
D.C. Resistance (Re)	0.5Ω (Paralleled)	1Ω (Paralleled)
Resonance Frequency (Fs)	30Hz	31Hz
Total Q (Qts)	0.46	0.46
Mechanical Q (Qms)	5.60	6.52
Electrical Q (Qes)	0.50	0.49
Stiffness (Vas)	4.85ft <sup>3</sup> / 137L	4.85ft <sup>3</sup> / 137L
Excursion (Xmax)	1.46" / 37mm pk-pk	1.46" / 37mm pk-pk
Cone Area (Sd)	184.2in <sup>2</sup> / 1188.5cm <sup>2</sup>	184.2in <sup>2</sup> / 1188.5cm <sup>2</sup>

**Sealed Boxes VS Ported Boxes:**

Sealed Boxes offer the most protection from mechanical damage, plus can offer the most accurate sound quality if not undersized. Exact size is not too critical and can be adjusted by stuffing (see below). Response decreases gradually at low frequencies giving a nearly flat frequency response in many vehicles. But, there's no path for heat to escape from the box (one reason for mounting "inside out")


**Ported (Vented) Boxes** do offer some heat ventilation. Sound quality is less accurate, but often more powerful. The trade-off: more powerful sound is often boomier. At frequencies below the port tuning, the enclosure does not restrict cone motion. Therefore, music with very low frequencies can bottom out the subwoofer, possibly causing damage. Also, the frequency response rolls off quickly, because the port stops functioning like a port and becomes more like a huge leak-the front and back waves from the subwoofer start to simply cancel each other. If possible, build the box so you can do test listening before final assembly. You can then adjust the port length to taste. If it sounds too boomy after final assembly, you can experiment with stuffing, but not near the port or cone or magnet vents.

**Box Stuffing:** Dense stuffing changes the thermal properties of the enclosure, and can make the enclosure act larger than the measured dimensions. This means sealed boxes can be made somewhat smaller with the same sound. For example, stuffing with 1 pound (1/2 kilo) of 100% polyester such as pillow stuffing could let you shrink the sealed box 15% but keep basically the same sound. Ported boxes cannot take advantage of this effect very well, since stuffing the enclosure can negatively affect the air flow in and out of the port. Coating the inside walls with anti-vibration compounds or sheeting can improve the sound as can bracing the enclosure.

**Ports:** Air in the box resists compression, like a spring. The port basically makes a plug of air, with a certain mass. The system resonates, kinda like how a car bounces up and down on its springs. A longer port has more mass, lowering the tuning. A bigger port also has more mass, but the larger area changes how much box stiffness the port "sees" and tuning goes up. To compensate, the port can be lengthened, but the port needs to be big enough to match the cone excursion. Unfortunately for auto sound buffs, this all means that a round port big enough to flow all the air often can't fit in the box! And, ports should NOT be built with elbows if at all possible, it kills the airflow.

**Port Radius:** Rounding the port ends reduces distortion at lower volumes. At high SPL, the air just "jets" in and out and the radiusing has little effect. (For slot ports, the shape is different, so do radius the inside end if you can).

**Crossfire recommends the use of Precision Ports™ for all round port applications. Precision Ports™ will increase SPL and reduce airflow turbulence at the entrance and exit of the port with its unique flare port design.**

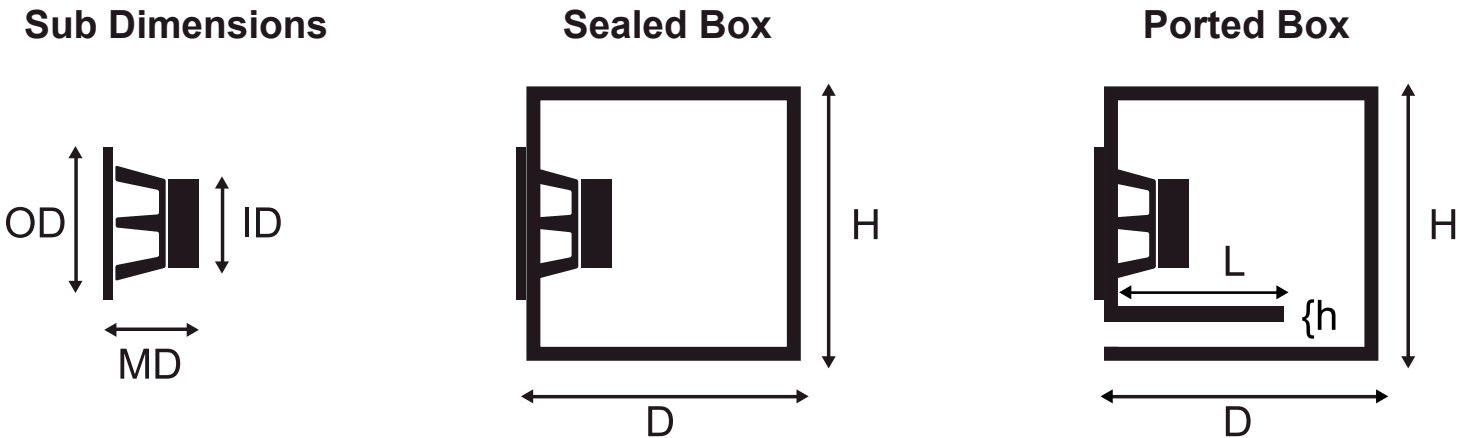

## RECOMENDED PORTED ENCLOSURES

MODEL:	C7 8D1	C7 8D2	C7 10D1	C7 10D2
Internal Volume (Net)	0.75ft <sup>3</sup>	0.75ft <sup>3</sup>	1.5ft <sup>3</sup>	1.5ft <sup>3</sup>
Port Tuning Frequency	38Hz	38Hz	35Hz	35Hz
Port Area	10 sq inches	10 sq inches	16 sq inches	16 sq inches
Port Length	22.25"	22.25"	20"	20"

MODEL:	C7 12D1	C7 12D2	C7 15D1	C7 15D2
Internal Volume (Net)	2.25ft <sup>3</sup>	2.25ft <sup>3</sup>	3.25ft <sup>3</sup>	3.25ft <sup>3</sup>
Port Tuning Frequency	35Hz	35Hz	34Hz	34Hz
Port Area	25 sq inches	25 sq inches	32 sq inches	32 sq inches
Port Length	20.25"	20.25"	18.25"	18.25"

MODEL:	C7 18D1	C7 18D2
Internal Volume (Net)	5.5ft <sup>3</sup>	5.5ft <sup>3</sup>
Port Tuning Frequency	34Hz	34Hz
Port Area	65 sq inches	65 sq inches
Port Length	21"	21"


**Please Note: All enclosure recommendations are based on net enclosure volume. Please add woofer displacement and port displacement to calculate accurate net enclosure volume. Example: C7 12D1 has a woofer displacement of .14ft<sup>3</sup> and a port displacement of .29ft<sup>3</sup>, So your ported enclosure needs to be 2.7ft<sup>3</sup> gross volume before all displacements, giving you a net volume 2.25ft<sup>3</sup>.**

**These recommended enclosures are general enclosure recommendations and can be varied to suit each customers application. For SPL type applications, enclosure volumes and tuning frequencies will vary for each application. For custom enclosure applications please contact Crossfire Technical Service Dept.**


## DUAL VOICE COIL WIRING OPTIONS

**Speaker Wiring Comments:** For each individual subwoofer, it doesn't matter if you wire the coils in series or parallel. However, don't wire in series with another subwoofer - that results in less than optimum power sharing and sound. Likewise, don't wire just one coil of a dual coil setup.


1 Sub-Series  
 1Ω DVC = 2Ω  
 2Ω DVC = 4Ω

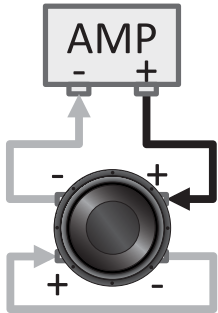


1 Sub-Parallel  
 1Ω DVC = 0.5Ω  
 2Ω DVC = 1Ω

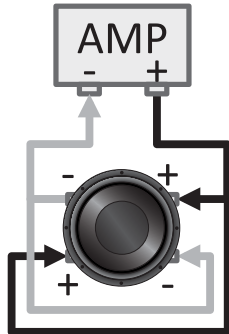


3 Subs in Parallel  
 (Each DVC wired in series)  
 (3) 1Ω DVC = .67Ω  
 (3) 2Ω DVC = 1.3Ω

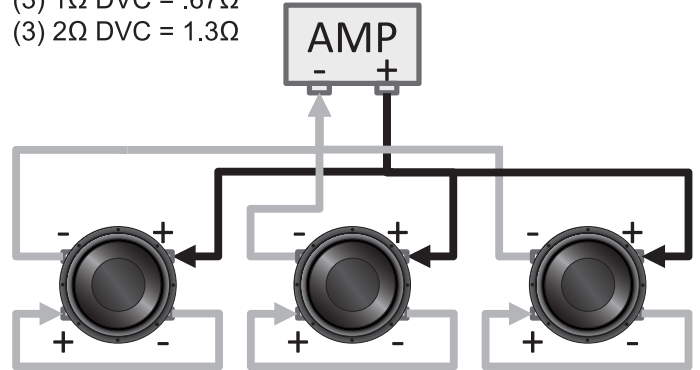


2 Subs in Parallel  
 (Each DVC wired in series)  
 (2) 1Ω = 1Ω  
 (2) 2Ω DVC = 2Ω

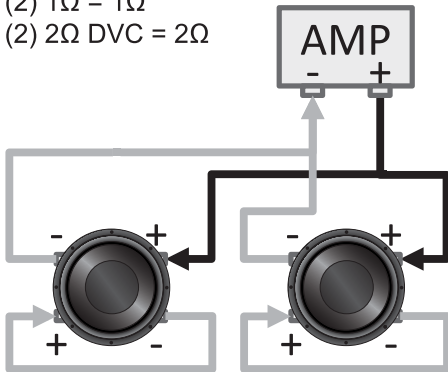

4 Subs in Parallel  
 (Each DVC wired in series)  
 (4) 1Ω = 0.5Ω  
 (4) 2Ω DVC = 1Ω

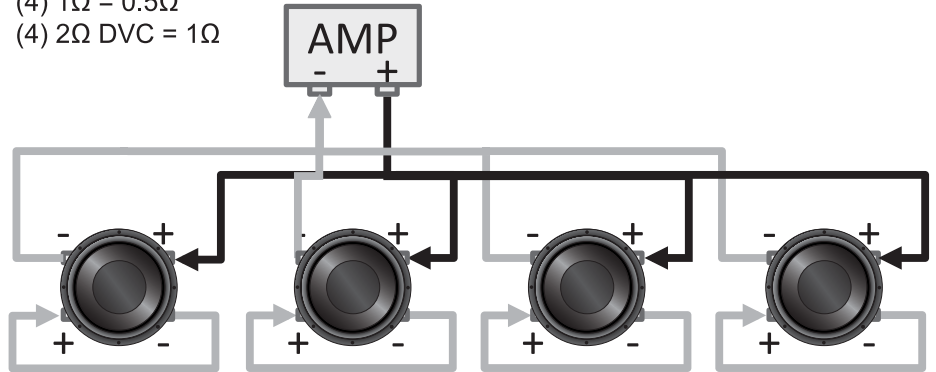

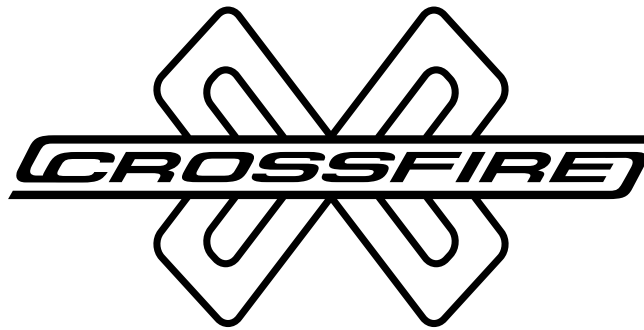

## ***LIMITED WARRANTY***

### **LENGTH OF WARRANTY**

Crossfire Subwoofers are covered by warranty for 1 year from date of purchase on parts and labor. This applies to the original purchaser only. Warranties are non-transferable.

### **DETAILS OF WARRANTY**

From the date of original purchase and for the respective period, specified above. Crossfire agrees to repair or replace all Crossfire products which are defective in material and/or workmanship. This warranty is not transferable and applies only to the original purchaser of the product. No Exceptions. It is Crossfire's right to decide if a product will be repaired or replaced.

All returns must be sent with an RA # on the outside of the box. Any and all products sent without an RA# will be refused. An RA # can be obtained by calling or faxing Crossfire and requesting the number.

Warranty claims must be accompanied by the original invoice to validate the warranty service.


### **EXCLUSIONS**

This warranty does not apply with respect to the following:

- Crossfire's warranty does not cover burned or open voice coils, lead wires, ripped surrounds or folded cones. These are all immediate signs of abuse and over-powering. It does not cover products driven over their mechanical limits.
- Defects or damage caused by accident, fire, flood, and lightning or other acts of God.
- Defects or damage caused by abuse, misuse, or negligence.
- Products with voice coils that have failed due to excessive power levels or clipping, i.e. burned or open voice coils or burned lead wires.
- Damage caused during shipping or handling. These claims are made with the Freight Company.
- Accessories or anything else attached to or to be used with Crossfire products.
- Products that have their serial numbers removed or altered.
- Packing materials i.e. cardboard boxes, foam inserts, corners, peanuts, etc.
- Adjustments or alterations required for any reason.
- Items subject to fatigue through normal wear and use.
- Products, which has been altered or repaired by anyone other than Crossfire.

### **RE-CONES**

All subwoofers that have been re-coned by Crossfire will continue under warranty until the full 1 year warranty has expired. Any re-cone not performed at Crossfire by an authorized Crossfire employee is not covered under warranty. The end consumer accepts the responsibility and liability of knowing this subwoofer no longer falls under Crossfire's warranty program when the re-cone they purchased and/or the labor was performed by the end consumer.

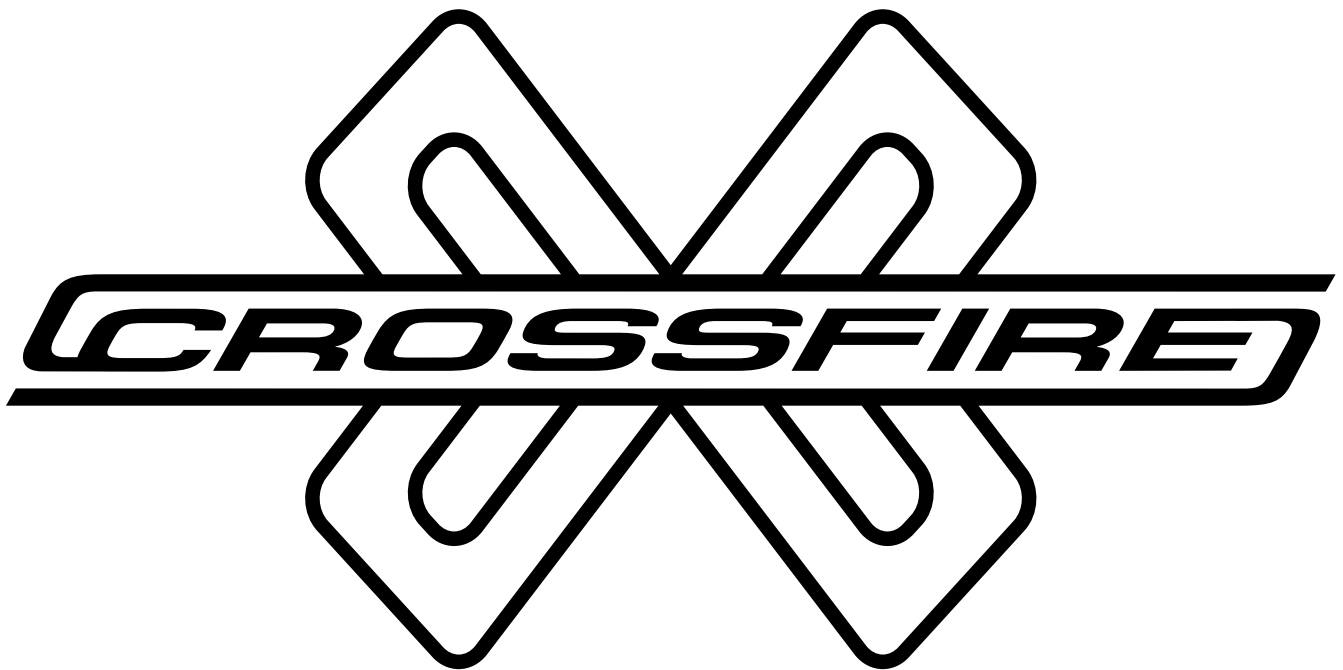

756 Port America Place. Suite 100 Grapevine, TX. 76051

Ph: (972) 570-0800 | (800) 332-2771

[www.crossfirecaraudio.com](http://www.crossfirecaraudio.com)